LAGAN

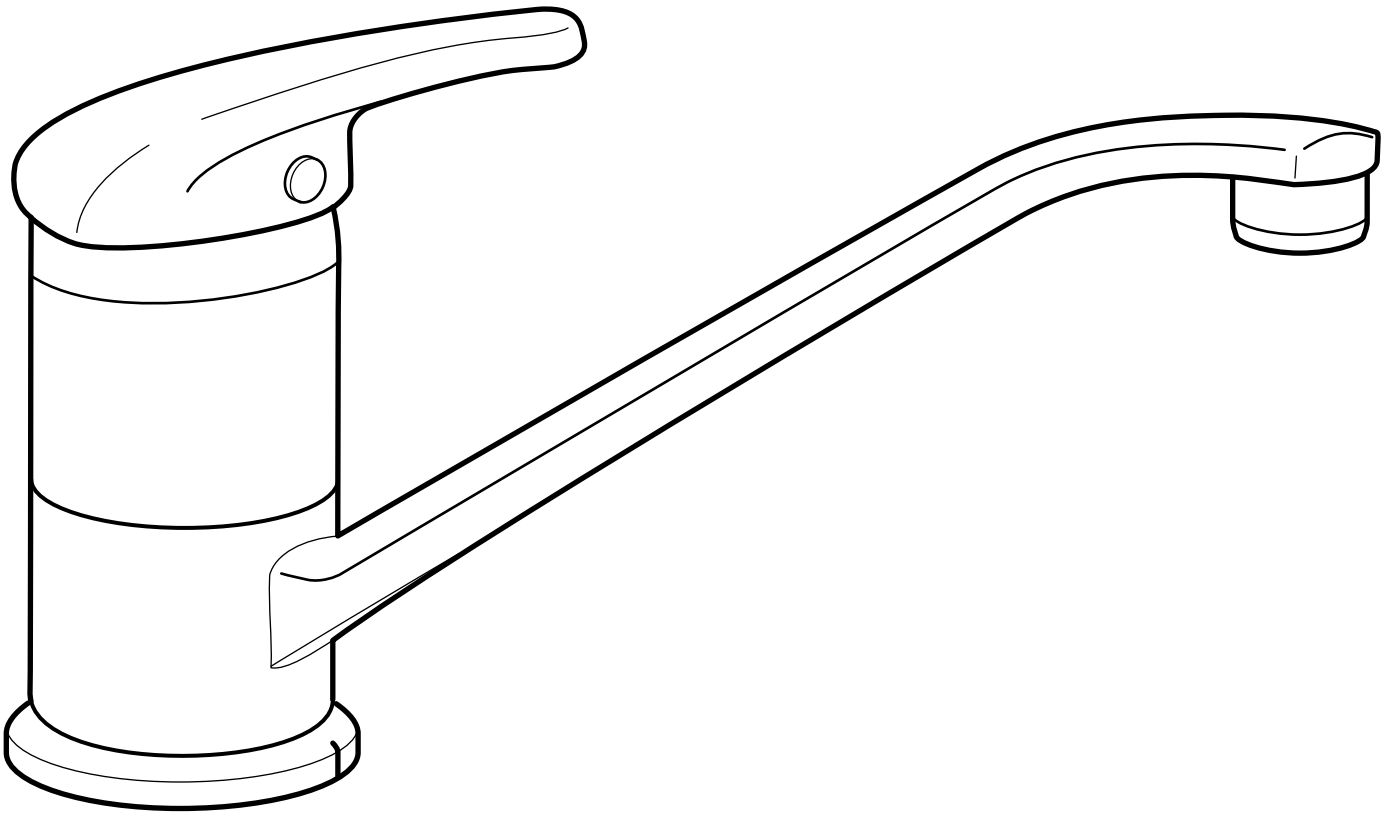

Design and Quality
IKEA of Sweden

English
Installation must be performed in compliance with current local construction and plumbing regulations. If in doubt, contact a professional.

English
Switch off main shut-off valve before changing mixer tap.

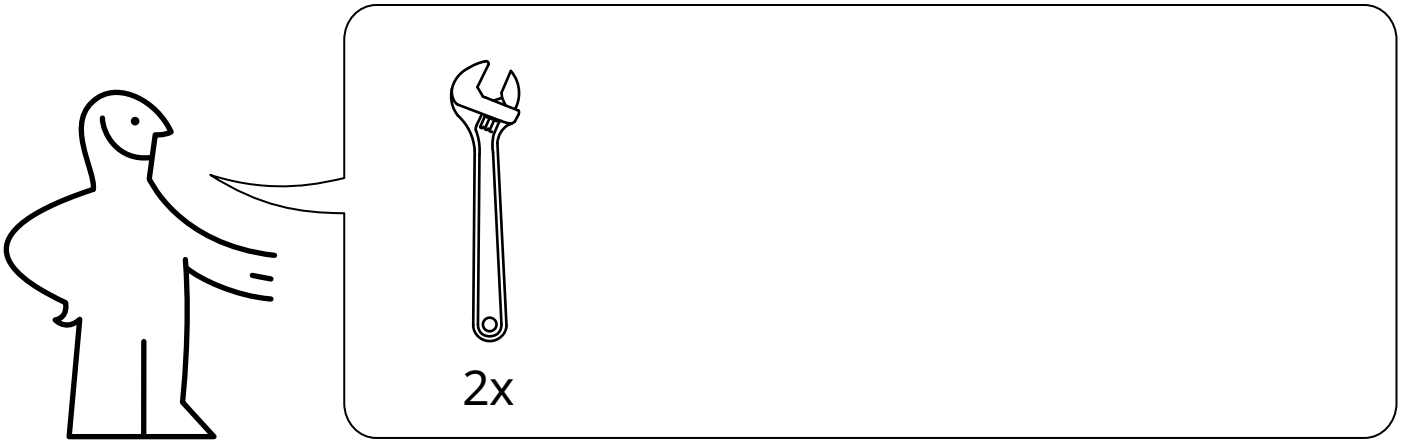

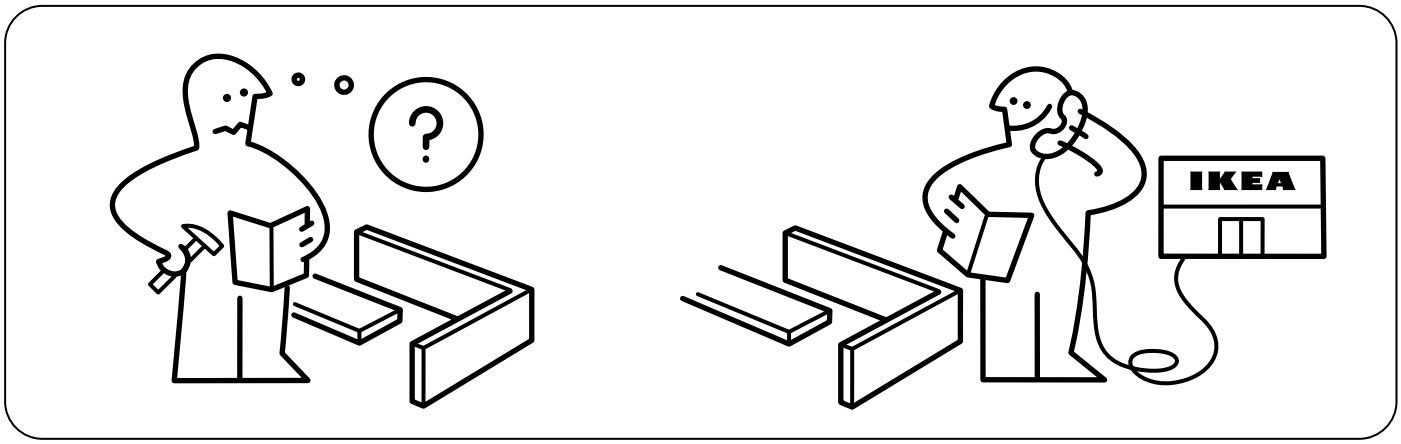

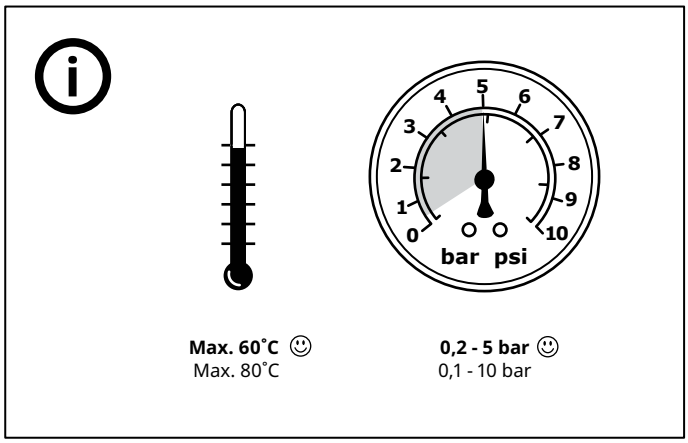

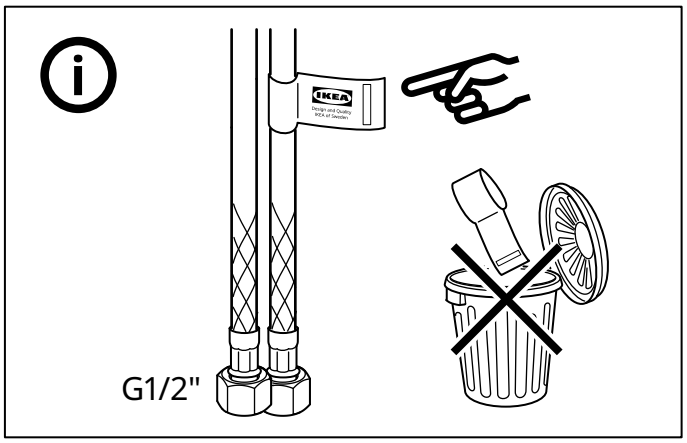

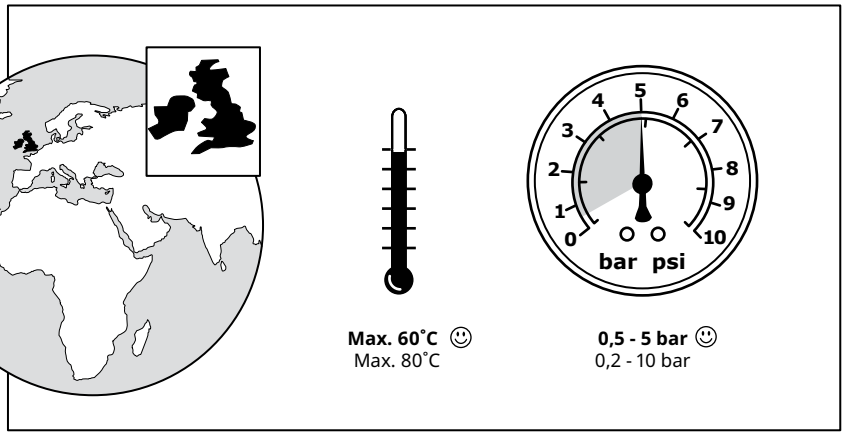

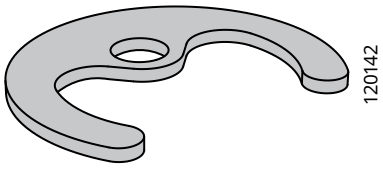

1x

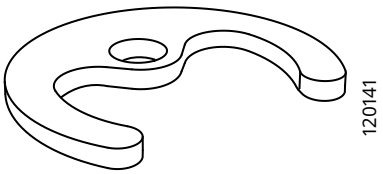

1x



1x

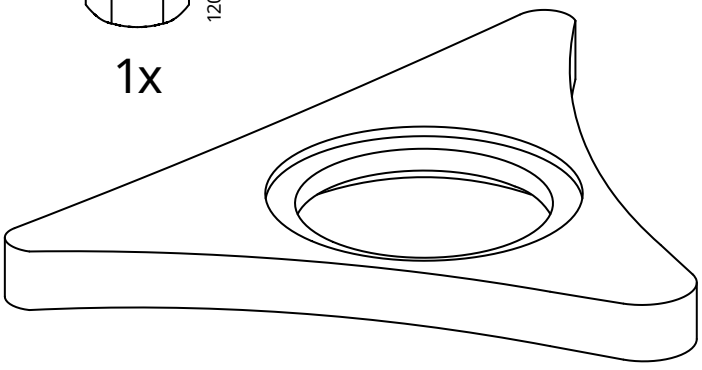

1x

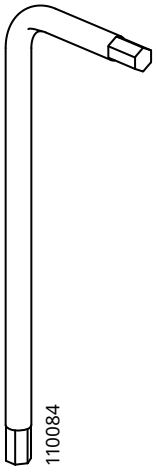

1x



1x

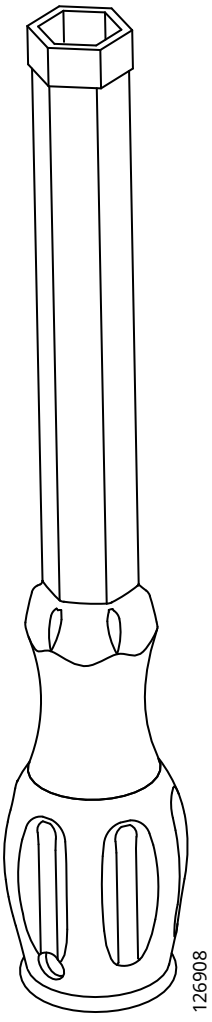

1x

1

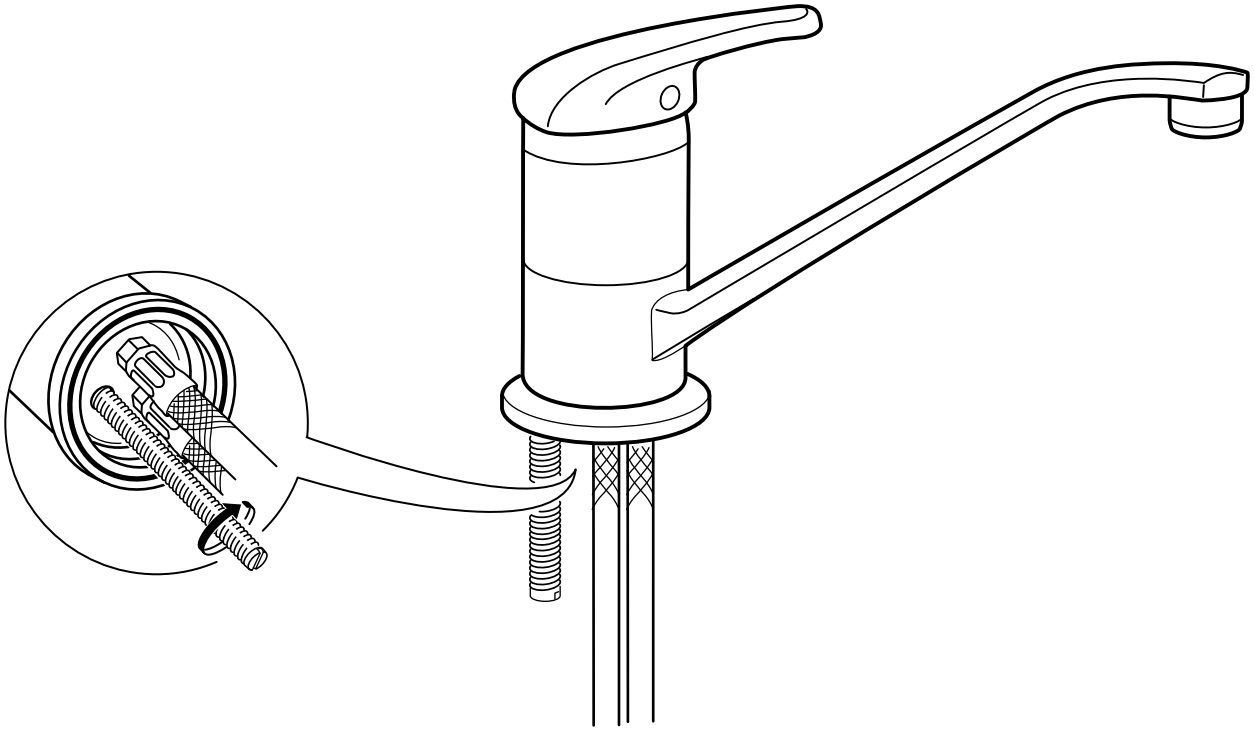

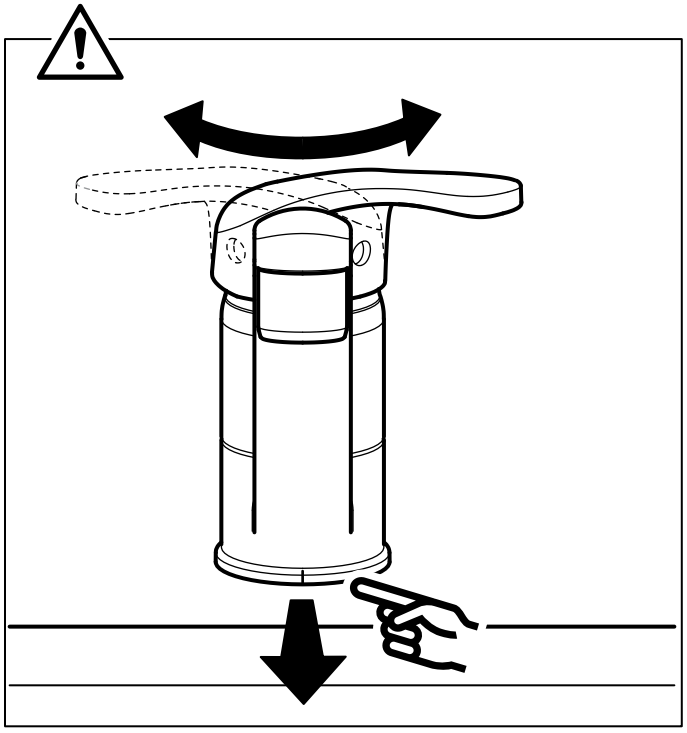

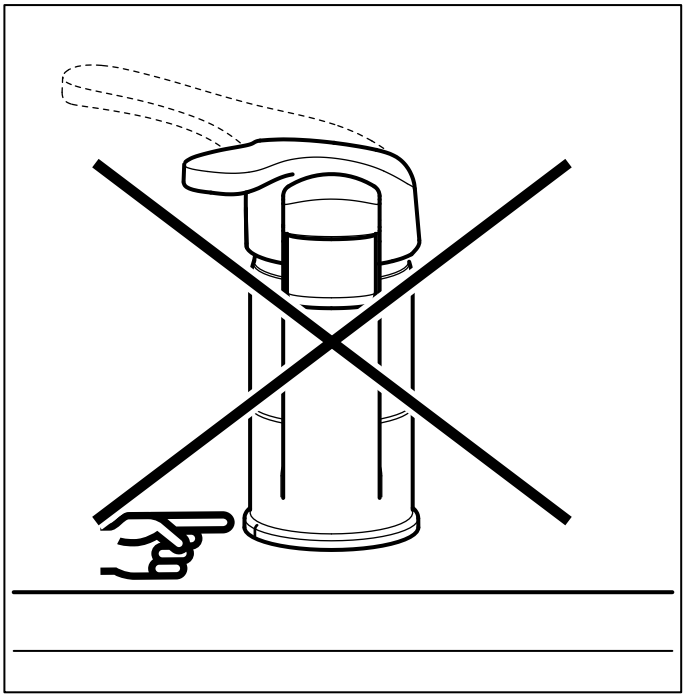

English
Seal the open surfaces with silicone to prevent water from penetrating the worktop upon any leaks. Silicone is not included.

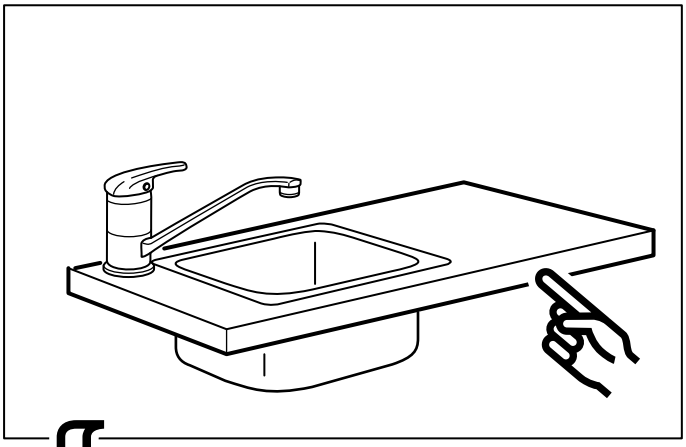

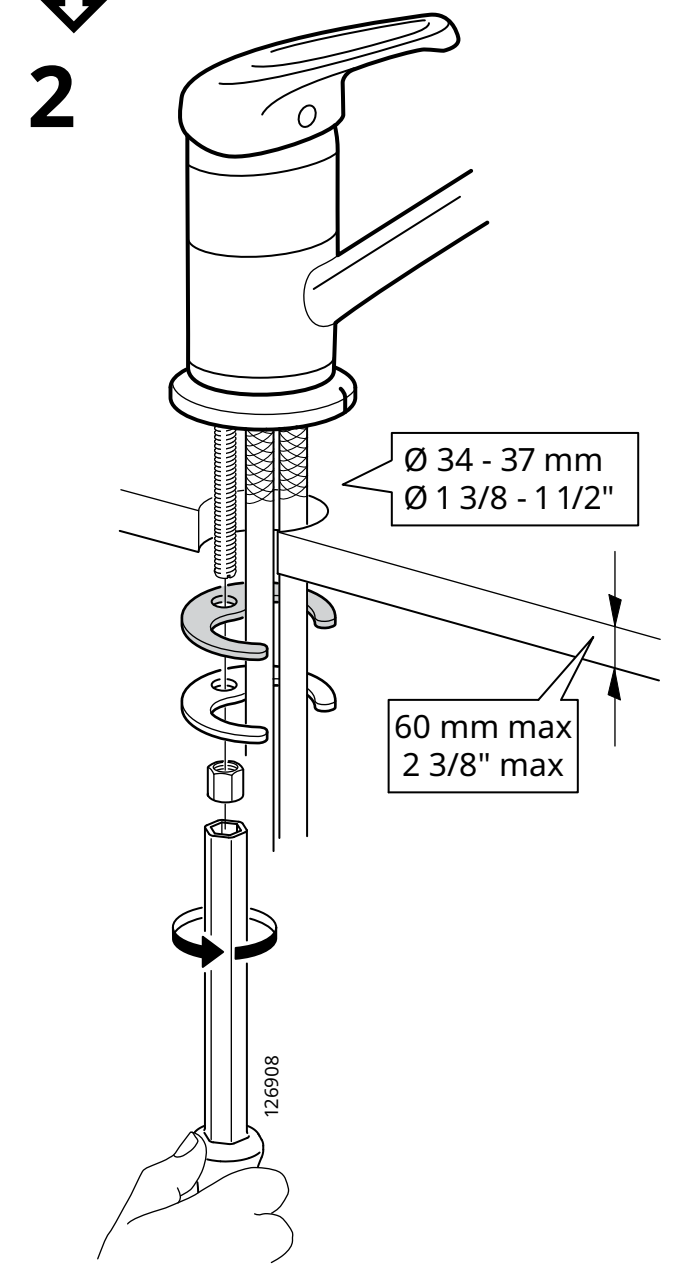
2
Ø 34 - 37 mm
Ø 1 3/8 - 1 1/2"
60 mm max
2 3/8" max
126908

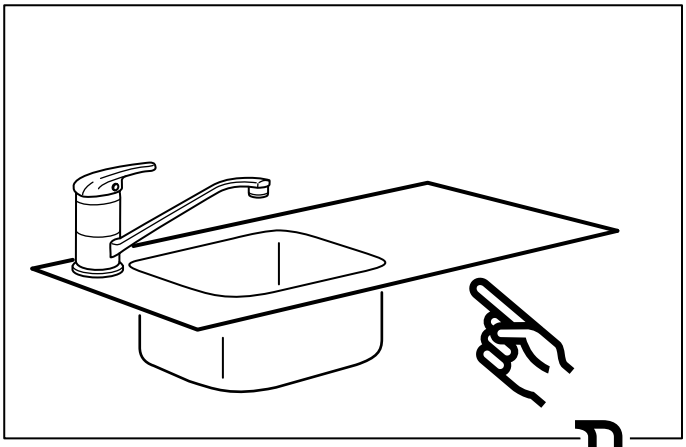

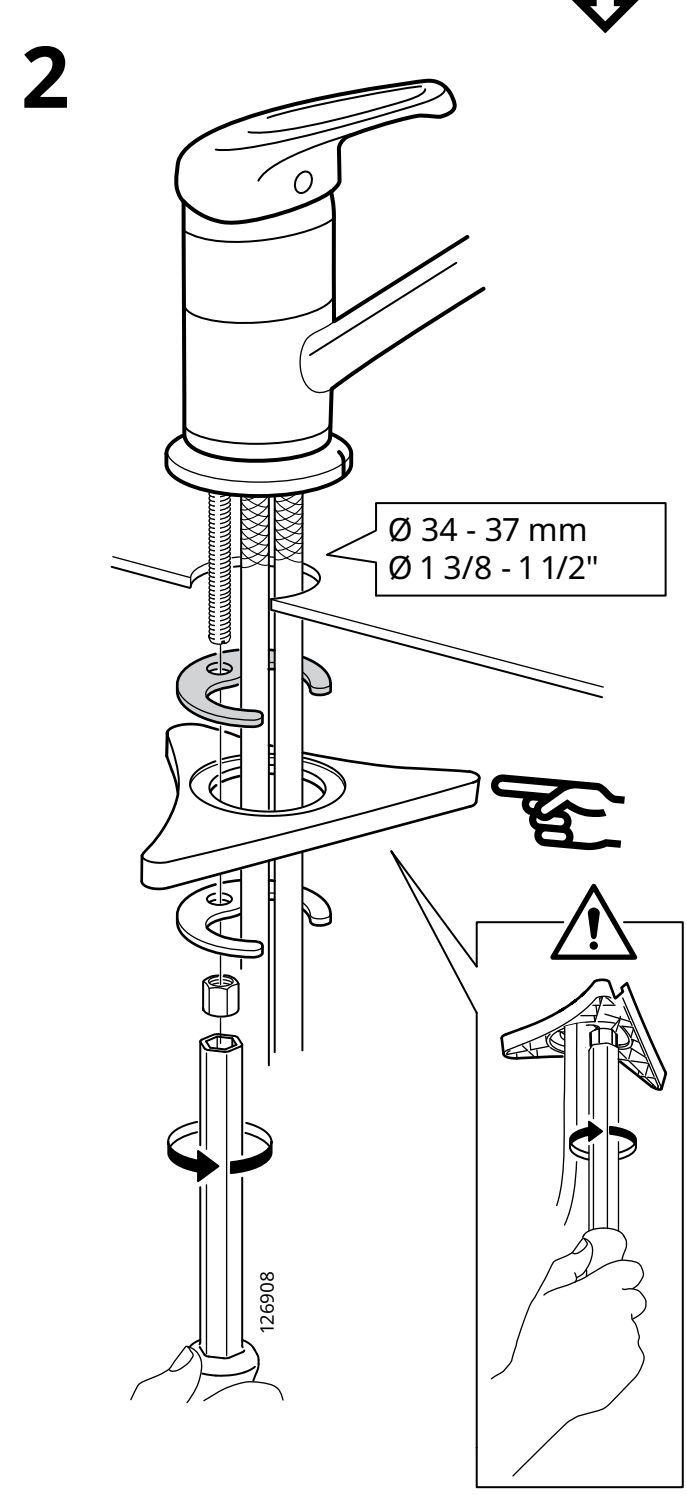
2
Ø 34 - 37 mm
Ø 1 3/8 - 1 1/2"
126908

3

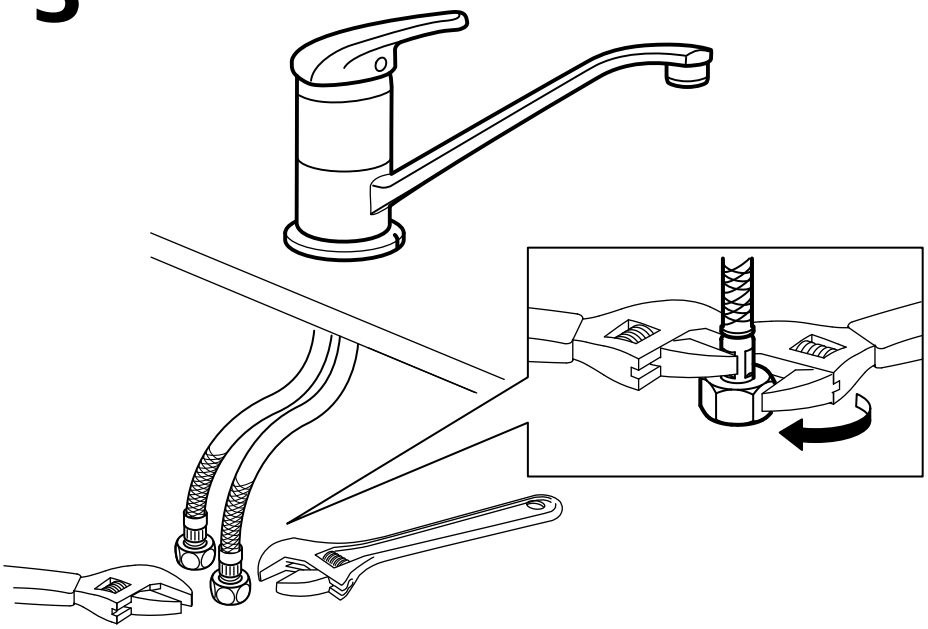

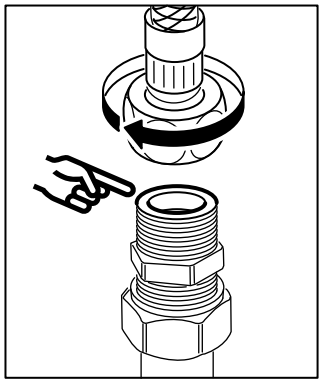

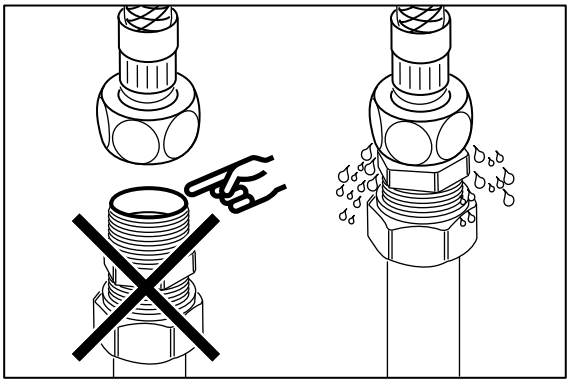

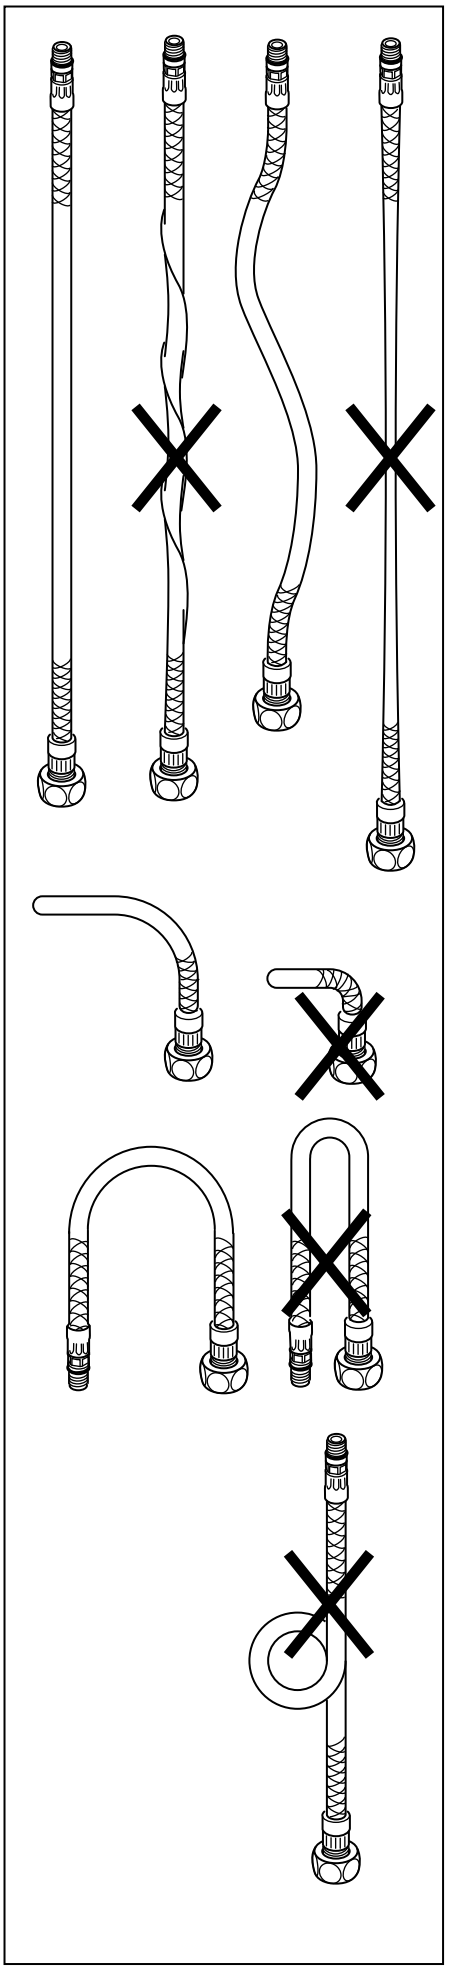

English
IMPORTANT! Do not tighten too hard: this can damage hoses/pipes and washers.

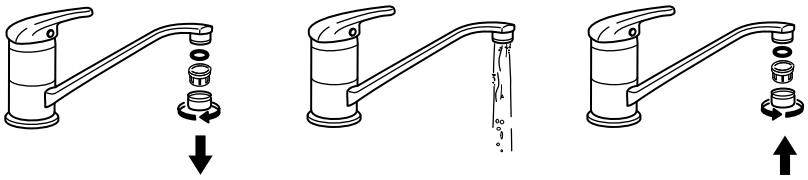

10004076
High pressure

117468
Pre-fitted
Low pressure

10004076
Pre-fitted
High pressure

118874
Low pressure

English
Before use: Unscrew the Aerator/Flow Guide and allow the water to run freely for a few minutes. Then screw the Aerator/Flow Guide back in place. Ensure that it is tight to prevent removal by hand.

English
To comply with UK water regulations, this product shall be installed in accordance with the following:

English
Inlet supply hoses shall be installed where light is excluded.

English
Water supplies shall be at reasonably balanced pressures from a common source (e.g. hot and cold supplies both from the same storage or both from a supply pipe). Where the fitting is supplied from unbalanced supplies (e.g. hot and cold supplies from separate sources) an ‘Approved’ single check valve or some other no less effective backflow prevention device shall be fitted immediately upstream of both hot and cold water inlets.

English
Check at regular intervals to make sure that the installation is not leaking.

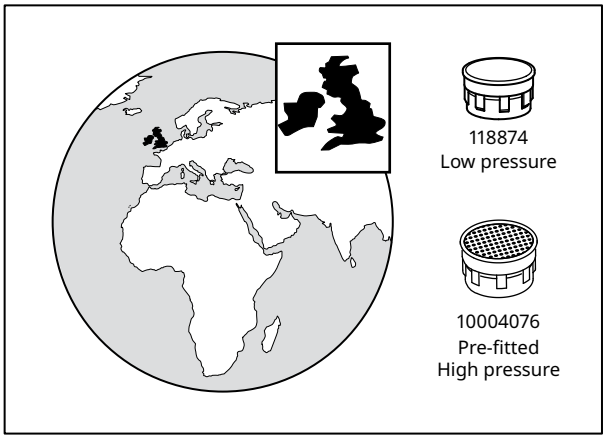

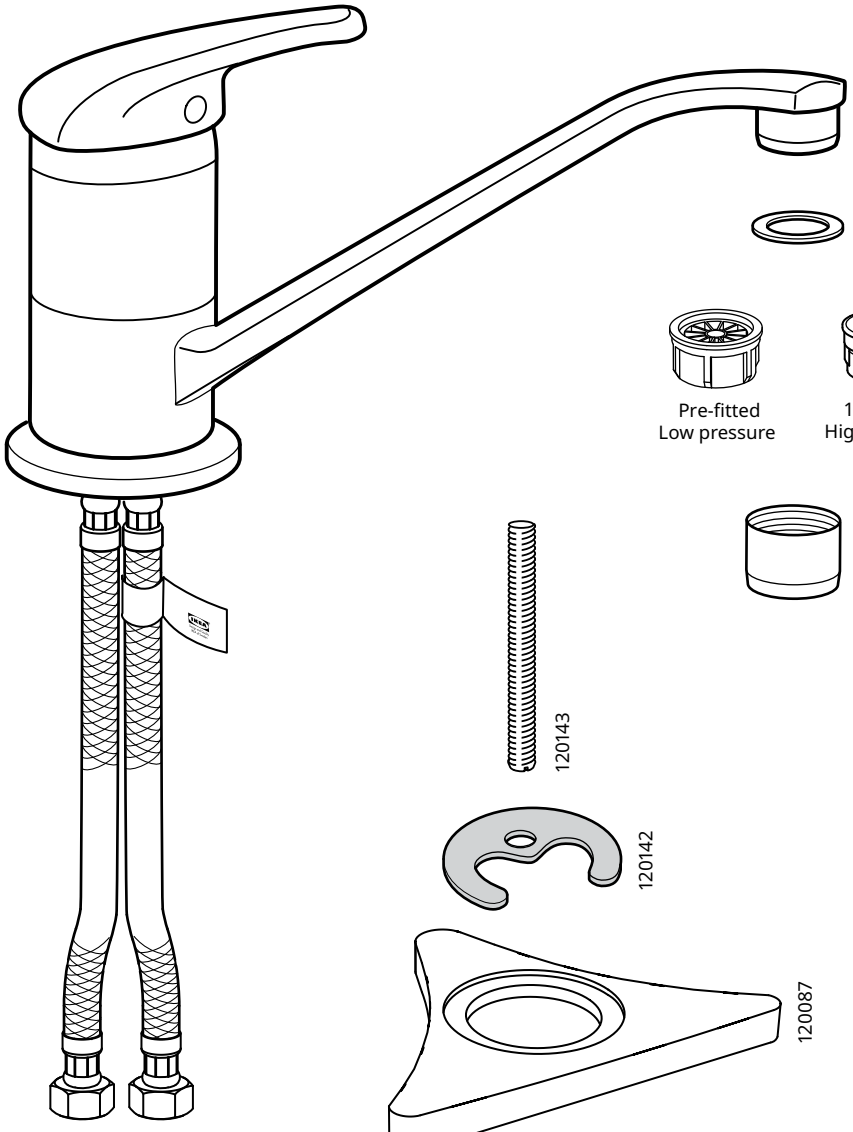

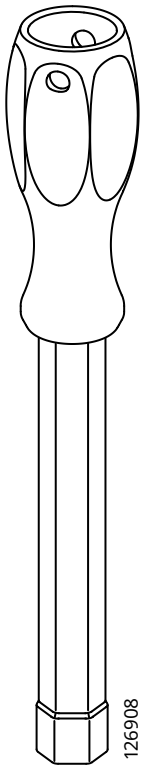

© Inter IKEA Systems B.V. 2020